


CONNECTOR PIN OUT MOTOR				CONNECTOR PIN OUT HALL SENSOR				零件名稱	材質及CODE	整理號碼	備註	
PIN #	WIRE	FUNCTION	WIRE GAUGE	PIN #	WIRE	FUNCTION	WIRE GAUGE					
1	Blue	PHASE"U"	UL3266-20AWG	4	Yellow	Vcc	UL3266-24AWG	無刷齒輪馬達	*		防銹處理	
2	Purple	PHASE"V"	UL3266-20AWG	5	Green	GND	UL3266-24AWG					
3	Gray	PHASE"W"	UL3266-20AWG	6	Palm	S1	UL3266-24AWG					
								更改	1			
								記事	2			

	Ratio	比數	L
1 STAGE	4.5, 6, 8	1/4.5-1/8	50
2 STAGE	20, 28, 39, 50	1/20-1/50	66
3 STAGE	91, 127, 162, 225, 244, 313	1/91-1/312	81

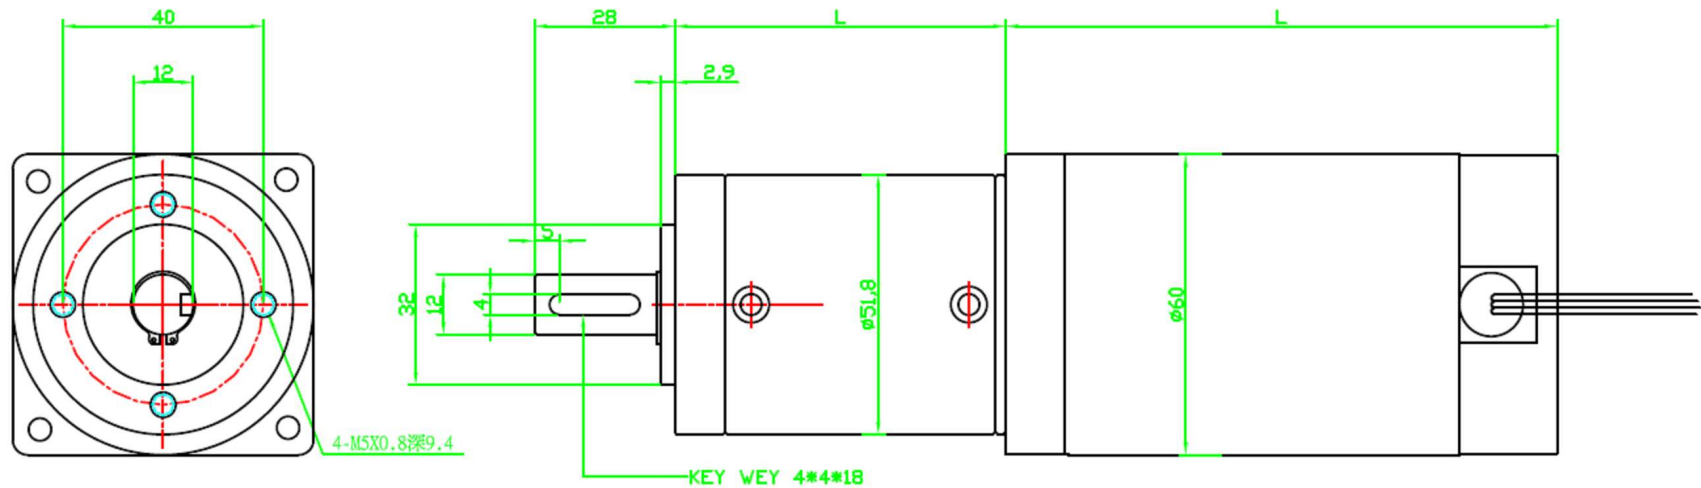

	BLDC60-L	BLDC60-M	BLDC60-S
L	109	84.5	59.5
Read Voltage	24VDC	24VDC	24VDC
Nolad Speed	4000RPM	3900RPM	4200RPM
Nolad Current	0.9A	0.5A	0.5A
Direction of Rotation	C.W.	C.W.	C.W.
Rated Power	120W	80W	40W
Reated Torque	3.9Kg-cm	2.6Kg-cm	1.3Kg-cm
Rated Current	8.0A	3.0A	3.0A
Rated Speed	4000RPM	3900RPM	3000RPM

校核		設計	Wing	比例	1:1
審定		繪圖	Wing	單位	M/M
		日期	05/21/2014		

SUZE technology

圖號 P52-BLDC60